



**5.0 inch TFT LCD
with Touch Panel
SPECIFICATION**

MODEL NAME LMTDA050YVN2- 4RA1

Date: 2011 / 08 / 26

Customer Signature		
Customer		
Approved Date	Approved By	Reviewed By

TFT Module Specification

ITEM NO.: LMTDA050YVN2-4RA1

Table of Contents

1. COVER & CONTENTS	1
2. RECORD OF REVISION	3
3. APPLICATION.....	4
4. GENERAL SPECIFICATIONS	4
5. ABSOLUTE MAXIMUM RATINGS	4
6. ELECTRICAL CHARACTERISTICS	4
7. BLOCK DIAGRAM	5
8. PIN CONNECTIONS	6
9. INTERFACE SPECIFICATIONS	9
10. OPTICAL CHARACTERISTIC	13
11. TOUCH PANEL CHARACTERISTICS.....	16
12. QUALITY ASSURANCE	17
13. PRECAUTIONS IN USE LCM.....	18
14. OUTLINE DRAWING.....	19
15. INSPECTION SPECIFICATIONS.....	20
16. WARRANTY	20
17. RMA	20



2. RECORD OF REVISION

Rev	Date	Item	Page	Comment
1	26/AGU/11'			Initial preliminary



3. APPLICATION

Digital equipments which need color display, such as P.O.S, medical equipments and industrial equipments.

4. GENERAL SPECIFICATIONS

Parameter	Specifications	Unit
Display resolution	(800X R.G.B) (W) x480(H)	dot
Active area	108(W) x 64.8(H)	mm
Screen size	5.0(Diagonal)	inch
Dot pitch	0.045(W) x 0.135(H)	mm
Color configuration	R.G.B. Stripe	
Overall dimension	118.1(W) x 77(H) x 4.26 (T)	mm
Weight	81	g
Surface treatment	Anti-Glare & Hard Coating	
View Angle direction(Gray inversion)	6 o'clock	
Our components and processes are compliant to RoHS standard		

5. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	MIN.	MAX.	Unit	Remark
Power supply voltage	V _{cc}	-0.3	5.0	V	
Logic input voltage	V _I	-0.3	5.0	V	
Operating temperature	T _{op}	-10	+60	°C	Ambient temperature
Storage temperature	T _{st}	-20	+70	°C	Ambient temperature

6. ELECTRICAL CHARACTERISTICS


GND=0V,CLK=33.26MHz,Ta=25°C

Parameter	Symbol	MIN.	Typ.	MAX.	Unit	Remark
Power Supply voltage for LCD	V _{CC}	+3.0	+3.3	+3.6	V	V _{CC} =3.3V
Power Supply Current for LCD	I _{CC}		95	125	mA	
Power Supply voltage for LCD	AVDD	4.8	5.0	5.2		
Power Supply voltage for LED	V _{LED}	--	26.5	--	V	
Power Supply Current for LED	I _{LED}	--	26	40	mA	
"H" level logical input voltage	V _{IH}	0.7V _{cc}	--	V _{cc}	V	
"L" level logical input voltage	V _{IL}	0	--	0.3V _{cc}	V	

Note 1: The "LED dice life time" is defined as the module brightness decrease to 50% original brightness that the ambient temperature is 25°C



7. BLOCK DIAGRAM

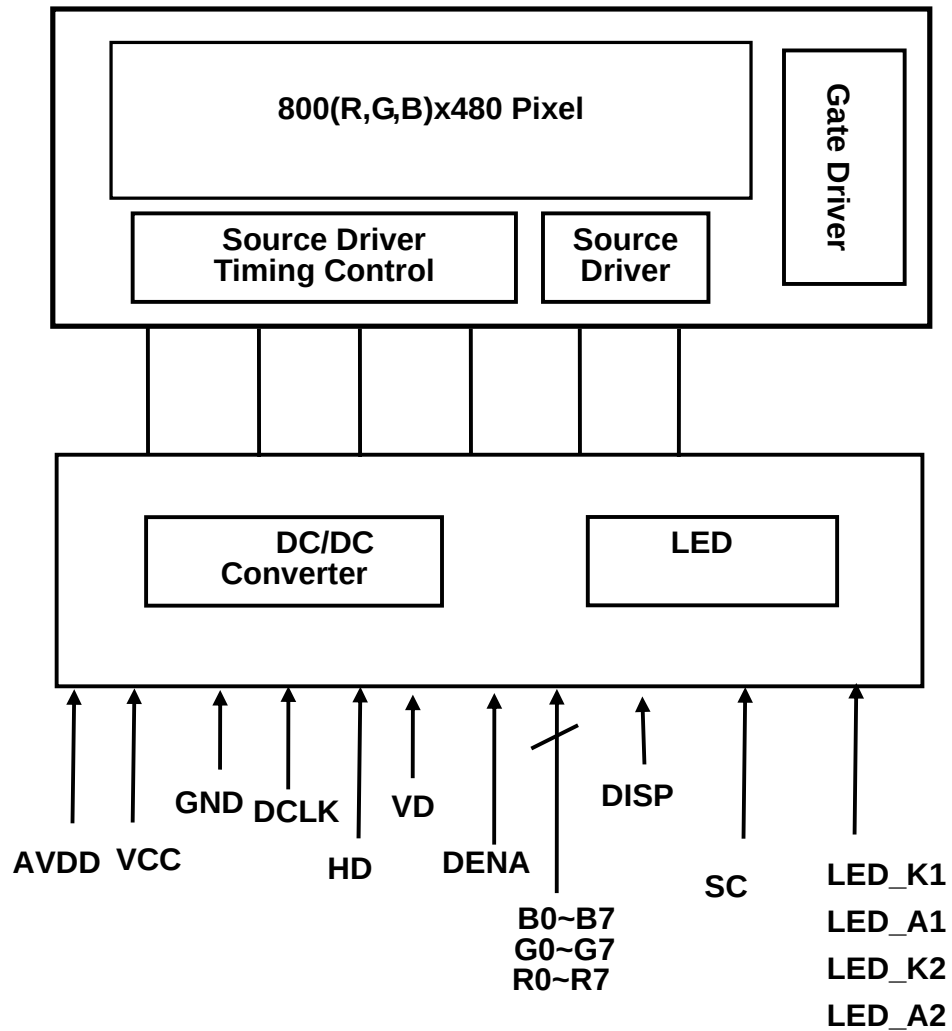

8. PIN CONNECTIONS

No	Symbol	I/O	Description
1	GND	I	Ground.
2	GND	I	Ground.
3	VCC	I	Digital power. 3V – 3.6V.
4	VCC	I	Digital power. 3V – 3.6V.
5	R0	I	Red data signal(LSB)
6	R1	I	Red data signal
7	R2	I	Red data signal
8	R3	I	Red data signal
9	R4	I	Red data signal
10	R5	I	Red data signal
11	R6	I	Red data signal
12	R7	I	Red data signal(MSB)
13	G0	I	Green data signal(LSB)
14	G1	I	Green data signal
15	G2	I	Green data signal
16	G3	I	Green data signal
17	G4	I	Green data signal
18	G5	I	Green data signal
19	G6	I	Green data signal
20	G7	I	Green data signal(MSB)
21	B0	I	Blue data signal(LSB)
22	B1	I	Blue data signal
23	B2	I	Blue data signal
24	B3	I	Blue data signal
25	B4	I	Blue data signal
26	B5	I	Blue data signal
27	B6	I	Blue data signal
28	B7	I	Blue data signal(MSB)
29	GND	I	Ground
30	DCLK (CLK)	I	Clock signal for sampling catch data signal
31	DISP	I	Display on/off(High:on,Low:off)




32	HD(HS)	I	Horizontal sync signal
33	VD(VS)	I	Vertical sync signal
34	DENA (DEN)	I	Data enable signal(to settle the viewing area)
35	AVDD	I	5.0V Analog Power Supply
36	AVDD	I	5.0V Analog Power Supply
37	NC	I	No connection
38	NC	I	No connection
39	SC	I	Scan direction control(Low=Reverse, High=Normal)
40	GND	I	Ground
41	GND	I	Ground
42	LED_K1	I	LED cathode①
43	LED_A1	I	LED anode①
44	LED_K2	I	LED cathode②
45	LED_A2	I	LED anode②


Display position and scan direction

D(X,Y) shows the data number of input signal for LCD panel signal processing PCB.

SC: High

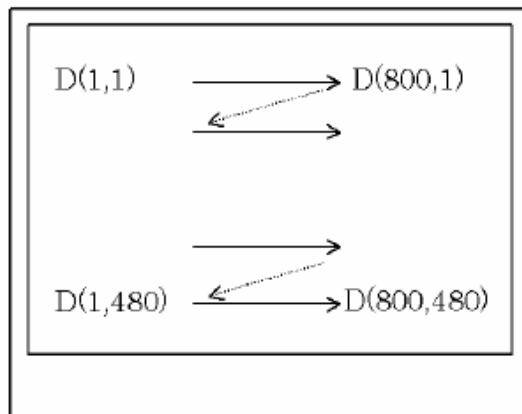

SC: Low

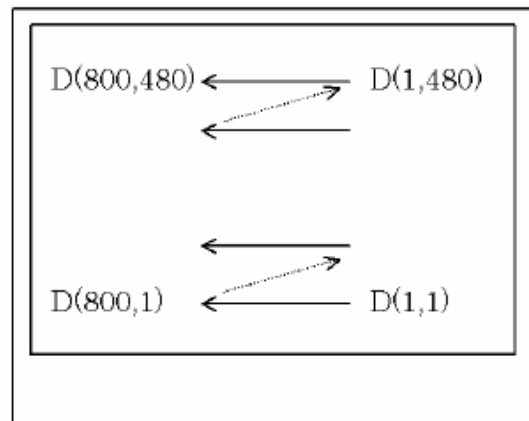

8.1 Power Signal Sequence

Remarks:

*1) Power

Signal

sequence:

$t1 \leq 10\text{ms}$:

$1\text{sec} \leq t5$


$50\text{ms} \leq t2$:

$200\text{ms} \leq t6$

$0 < t3 \leq 50\text{ms}$:

$200\text{ms} \leq t7$


$0 < t4 \leq 10\text{ms}$

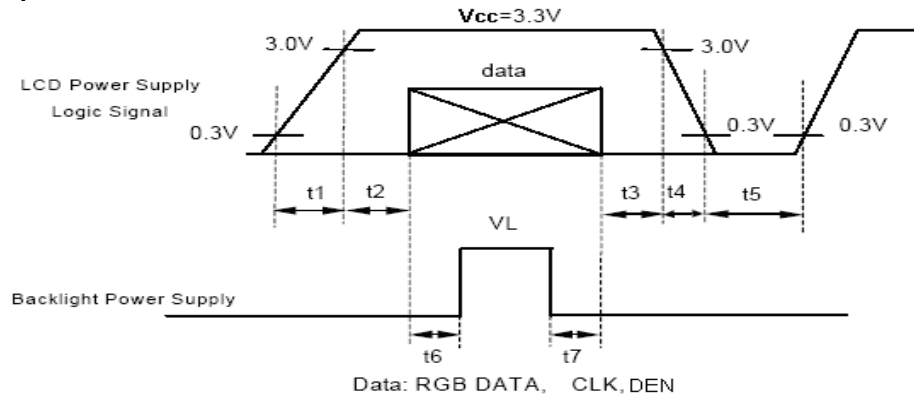

*2) VCC-dip condition:

(1) $2.7\text{V} \leq V_{CC} < 3.0\text{V}$, $t_d \leq 10\text{ms}$

(2) $V_{CC} > 3.0\text{V}$, VCC-dip condition should be the same with VCC-turn-on condition.

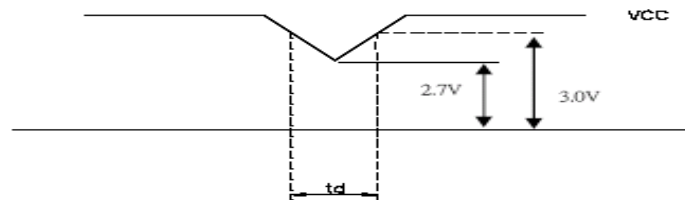

9. INTERFACE SPECIFICATIONS

9.1 Input Signal Characteristics

9.1.1 AC Electrical Characteristics

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
HS setup time	T_{hst}	6	-	-	ns
HS hold time	T_{nhd}	6	-	-	ns
VS setup time	T_{vst}	6	-	-	ns
VS hold time	T_{vhd}	6	-	-	ns
Data setup time	T_{dsu}	6	-	-	ns
Data hold time	T_{dhd}	6	-	-	ns
DEN setup time	T_{esu}	6	-	-	ns
DEN setup time	T_{esu}	6	-	-	ns

9.1.2 Resolution : 800x480

● Sync mode

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
CLK frequency	F_{CPH}	-	33.26	-	MHz
CLK period	T_{CPH}	-	30.06	-	ns
CLK pulse duty	T_{CWH}	40	50	60	%
HS period	T_H	-	1056	-	T_{CPH}
HS pulse width	T_{WH}	1	128	-	T_{CPH}
HS-first horizontal data time	T_{HS}	-	216	-	T_{CPH}
HS Active Time	T_{HA}	-	800	-	T_{CPH}
VS period	T_V	-	525	-	T_H
VS pulse width	T_{WV}	1	2	-	T_H
VS-DEN time	T_{VS}	-	35	-	T_H
VS Active Time	T_{VA}	-	480	-	T_H

● DE mode

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
CLK frequency	F_{CPH}	-	33.26	-	MHz
CLK period	T_{CPH}	-	30.06	-	ns
CLK pulse duty	T_{CWH}	40	50	60	%
DEN period	$T_{DEH}+T_{DEL}$	1000	1056	1200	T_{CPH}
DEN pulse width	T_{DH}	-	800	-	T_{CPH}
DEN frame blanking	T_{DEB}	10	45	110	$T_{DEH}+T_{DEL}$
DEN frame width	T_{DE}	-	480	-	$T_{DEH}+T_{DEL}$

(i) $T_{VS} + T_{VA} < T_H$



9.2 Timing Controller Timing Chart

9.2.1 Clock and Data Input Waveforms


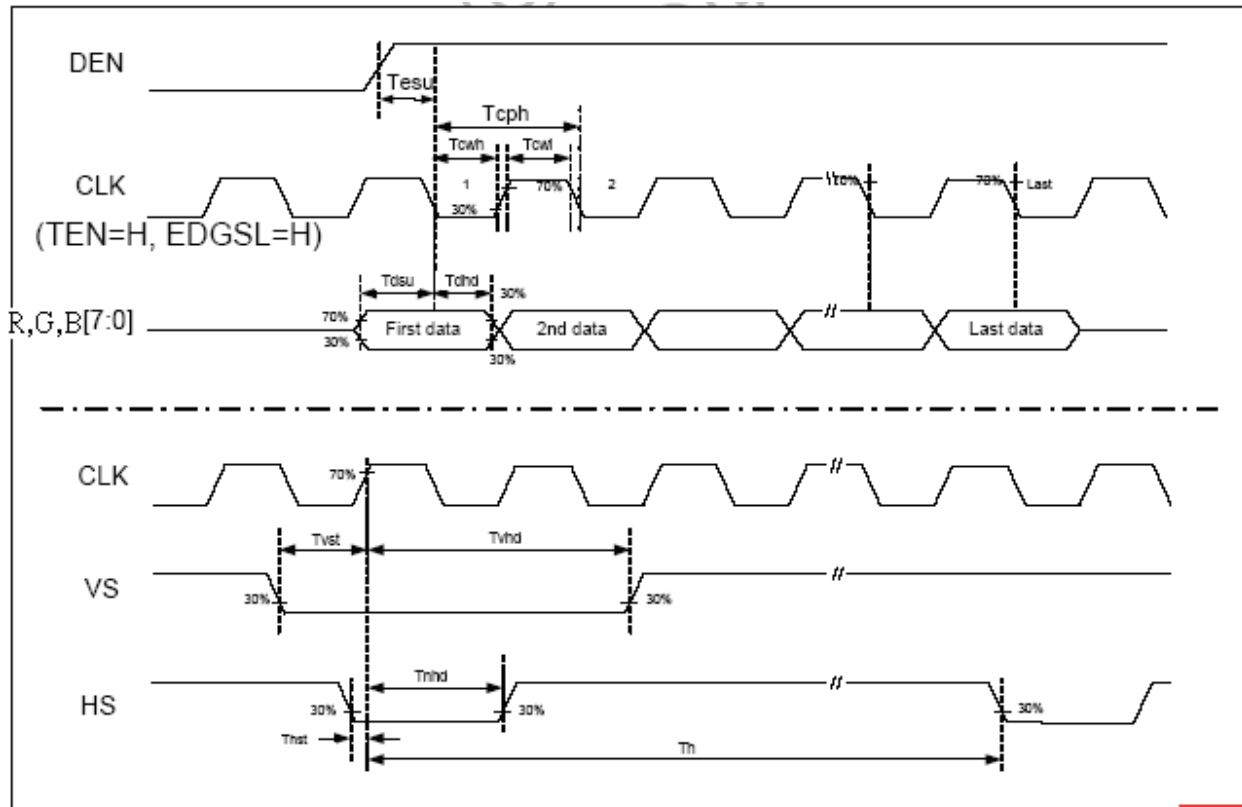


Figure 1 Clock and Data input waveforms.



**Horizontal Timing (SYNC mode)
(EDGSL=H)**



9.3 Color Data Input Assignment

COLOR	INPUT DATA	R DATA								G DATA								B DATA							
		R7	R6	R5	R4	R3	R2	R1	R0	R7	R6	R5	R4	R3	R2	R1	R0	R7	R6	R5	R4	R3	R2	R1	R0
		MSB							LSB	MSB							LSB	MSB							LSB
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	GREEN(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	GREEN(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
BLUE	BLUE (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	BLUE (2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
	BLUE (254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

[NOTE] :

- 1) Definition of Gray level : Color(n) : n to show the Gray level · n is the more high and the light more bright.
- 2) Data:1-High, 0-Low.

Correspondence between Data and Display Position

	S0001	S0002	S0003	S0004	S0005	S0006	S0007	S0008	-----	S2399	S2400
C001	R001	G001	B001	R002	G002	B002	R003	G003		G800	B800
C480	R001	G001	B001	R002	G002	B002	R003	G003		G800	B800




10. OPTICAL CHARACTERISTIC

Parameter		Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remarks
Viewing Angle	Horizontal	θ_x+	Center CR≥10	60	70	--	deg	Note 1,4
		θ_x-		60	70	--		
	Vertical	θ_y+		40	50	--		
		θ_y-		60	70	--		
Contrast Ratio		CR	at optimized viewing angle	300	400			Note 1,3
Response time	Rise	Tr	Center	-	15	30	ms	Note 1,6
	Fall	Tf	$\theta_x=\theta_y=0^\circ$	-	35	50	ms	
Uniformity		B-uni	$\theta_x=\theta_y=0^\circ$	70	80	--	%	Note1,5
Center Brightness		L	$\theta_x=\theta_y=0^\circ$	320	400	--	cd/m ²	Note 1,2,9
Chromaticity		x_W	Center $\theta_x=\theta_y=0^\circ$	0.27	0.32	0.37		Note 1,7
		y_W		0.30	0.35	0.40		
		x_R		0.5523	0.6023	0.6523		
		y_R		0.3159	0.3659	0.4159		
		x_G		0.3004	0.3504	0.4004		
		y_G		0.5302	0.5802	0.6302		
		x_B		0.1008	0.1508	0.2008		
		y_B		0.0852	0.1352	0.1852		
Image sticking		tis	2 hours			2	Sec	Note 8

The following optical specifications shall be measured in a darkroom or equivalent state (ambient luminance ≤ 1 lux, and at room temperature). The operation temperature is $25^\circ\text{C} \pm 2^\circ\text{C}$. The LED current ILED=26mA. The measurement method is shown in Note1.

Note1: The method of optical measurement:

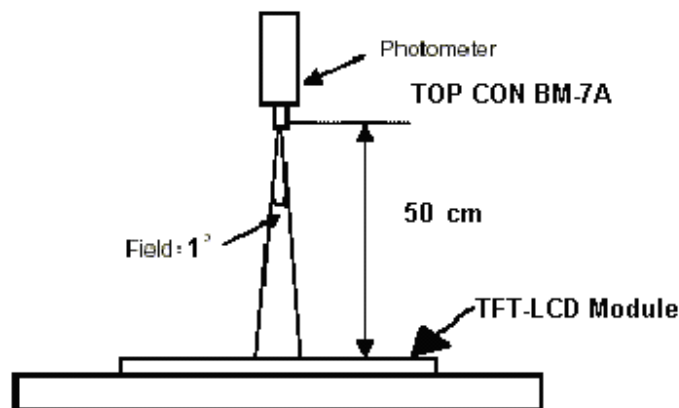


Note2: Measured at the center area of the panel and at the viewing angle of the $\theta_x = \theta_y = 0^\circ$


Note3: Definition of Contrast Ratio (CR):

$$CR = \frac{\text{Luminance with all pixels in white state}}{\text{Luminance with all pixels in Black state}}$$

Note4: Definition of Viewing Angle

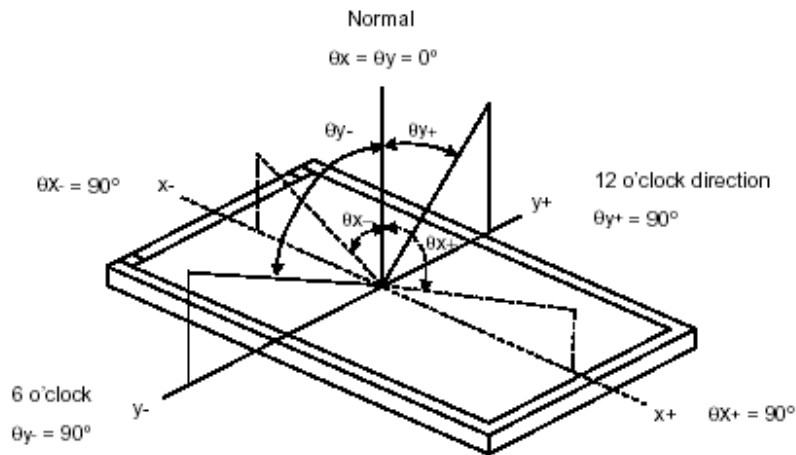

Note 5: Definition of Brightness Uniformity (B-uni):

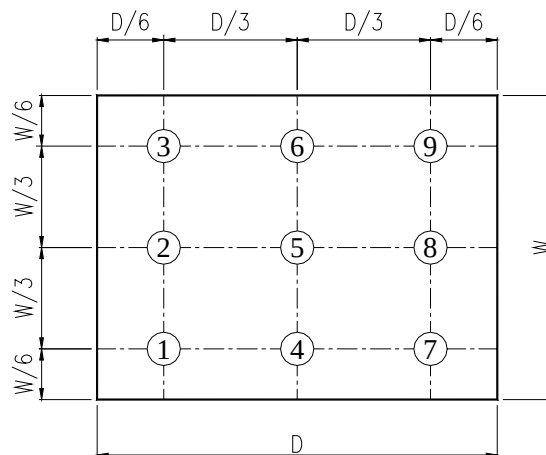


$$B\text{-uni} = \frac{\text{Minimum luminance of 9 points}}{\text{Maximum luminance of 9 points}} \quad (\text{Note 5}).$$



Note6: Definition of Response Time:

The Response Time is set initially by defining the "Rising Time (T_r)" and the "Falling Time (T_f)" respectively. T_r and T_f are defined as following figure.

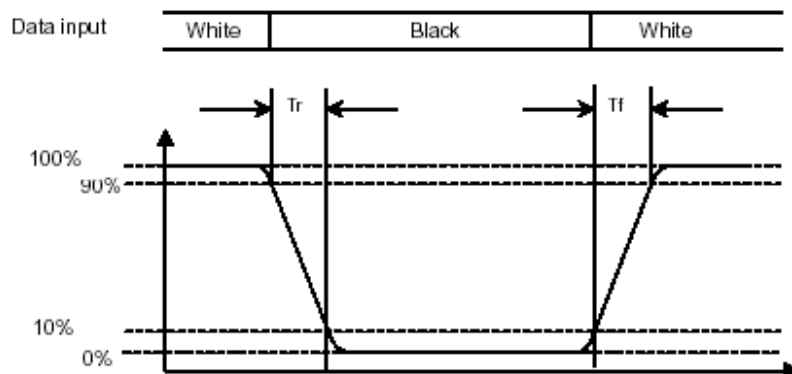


Note 7: Definition of Chromaticity:

The color coordinates (x_W, y_W), (x_R, y_R), (x_G, y_G), and (x_B, y_B) are obtained with all pixels in the viewing field at white, red, green, and blue states, respectively.

Note 8: Definition of Image sticking (tis):

Continuously display the test pattern shown in the figure below for 2 hours. Then display a completely white screen. The previous image shall not persist more than 2 sec at 25 °C

Image sticking pattern

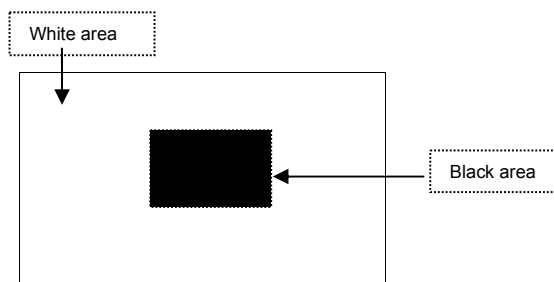

Note 9: the relationship between power consumption and brightness of the table <Just reference>

Backlight current	Power consumption	Brightness	Brightness after LCD glass	Expecting Brightness after LCD glass & TP
13mA	700mW	4600	450	340
15mA	817mW	4800	470	360
20mA	1123mW	6300	610	450



11. TOUCH PANEL CHARACTERISTICS

1. Input Method and Activation Force

Input Method	Average Activation Force
1.6mm dia .Silicon "finger"	120gf Max

2. Typical Optical Characteristics

ITEM	Parameter
Visible Light Transmission	75% (Typ)

3. Electrical Specification

ITEM	Parameter
Operating Voltage	5V(DC) Typ
Contact current	According to individual design
Circuit close resistance	X 100 Ω ~ 450 Ω Y 400 Ω ~ 1100 Ω
Circuit open resistance	10M Ω min(DC 25V)
Contact bounce	$\leq$ 20ms
Linear Test	$\leq$ 1.5%

4. Linearity

ITEM	Parameter
Linear Test Specification Direction	X $\leq$ 1.5% Y $\leq$ 1.5%


5. Specification

ITEM	Parameter
Operating Temperature	-10°C~+60°C
Storage Temperature	-20°C~+70°C
Surface Treatment	Anti-Newton ring

6. Durability test:

6.1 Touch panel is hit 10 millions times with a silicone rubber of R8 finger, hitting rate is by T.B.D g at 2 times per second. The measurement must satisfy the following:


- Circuit close resistance: x 100 Ω ~ 450 Ω ;
y 400 Ω ~ 1100 Ω .
- Circuit open resistance: >20M Ω at DC 25V
- Contact bounce: $\leq$ 20ms
- Linearity test: $\leq$ 3%

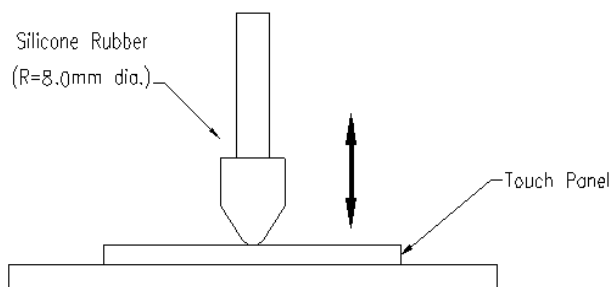

6.2 Stylus writing

Touch panel is drawn by R0.8 Darling stylus pen, at 200g forces, repeat one inch by 100k times. The measurement must satisfy the following:

- Circuit close resistance: x 100 Ω ~ 450 Ω ;
y 400 Ω ~ 1100 Ω .
- Circuit open resistance: >20M Ω at DC 25V
- Contact bounce: $\leq$ 20ms
- Linearity test: $\leq$ 3%

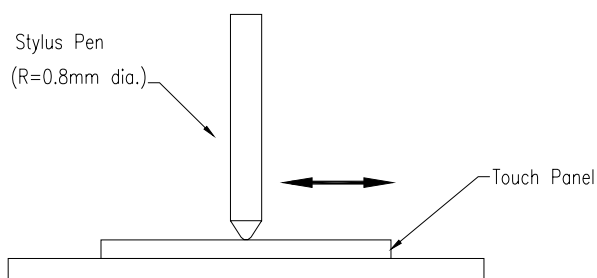

12. QUALITY ASSURANCE

12.1 Test Condition

12.1.1 Temperature and Humidity (Ambient Temperature)

Temperature : $25 \pm 5^{\circ}\text{C}$

Humidity : $65 \pm 5\%$

12.1.2 Operation

Unless specified otherwise, test will be conducted under function state.

12.1.3 Container

Unless specified otherwise, vibration test will be conducted to the product itself without putting it in a container.

12.1.4 Test Frequency

In case of related to deterioration such as shock test. It will be conducted only once.

12.1.5 Test Method

No.	Reliability Test Item & Level	Test Level
1	High Temperature Storage Test	T=70°C,240hrs
2	Low Temperature Storage Test	T=-20°C,240hrs
3	High Temperature Operation Test	T=60°C,240hrs
4	Low Temperature Operation Test	T=-10°C,240hrs
5	High Temperature and High Humidity Operation Test	T=40°C,90% RH,240hrs
6	Thermal Cycling Test (No operation)	-20°C → +25°C → +70°C,200 Cycles 30 min 5min 30 min
7	Vibration Test (No operation)	Frequency:0 ~ 55 Hz Amplitude:1.5 mm Sweep Time:11min Test Period:6 Cycles for each Direction of X,Y,Z
8	Electrostatic Discharge Test (No operation)	150pF,330Ω Air:± 15KV;Contact: ±8KV 10 times/point;4 points/panel face



13. PRECAUTION FOR USING LCM

1. LIQUID CRYSTAL DISPLAY (LCD)

LCD is made up of glass, organic sealant, organic fluid, and polymer based polarizers. The following precautions should be taken when handling,

- (1). Keep the temperature within range of use and storage. Excessive temperature and humidity could cause polarization degradation, polarizer peel off or bubble.
- (2). Do not contact the exposed polarizers with anything harder than an HB pencil lead. To clean dust off the display surface, wipe gently with cotton, chamois or other soft material soaked in petroleum benzine.
- (3). Wipe off saliva or water drops immediately. Contact with water over a long period of time may cause polarizer deformation or color fading, while an active LCD with water condensation on its surface will cause corrosion of ITO electrodes.
- (4). Glass can be easily chipped or cracked from rough handling, especially at corners and edges.
- (5). Do not drive LCD with DC voltage.

2. Liquid Crystal Display Modules

2.1 Mechanical Considerations

LCM are assembled and adjusted with a high degree of precision. Avoid excessive shocks and do not make any alterations or modifications. The following should be noted.

- (1). Do not tamper in any way with the tabs on the metal frame.
- (2). Do not modify the PCB by drilling extra holes, changing its outline, moving its components or modifying its pattern.
- (3). Do not touch the elastomer connector, especially insert an backlight panel (for example, EL).
- (4). When mounting a LCM make sure that the PCB is not under any stress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.
- (5). Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing pixels.

2.2. Static Electricity

LCM contains CMOS LSI's and the same precaution for such devices should apply, namely

- (1). The operator should be grounded whenever he/she comes into contact with the module. Never touch any of the conductive parts such as the LSI pads, the copper leads on the PCB and the interface terminals with any parts of the human body.
- (2). The modules should be kept in antistatic bags or other containers resistant to static for storage.
- (3). Only properly grounded soldering irons should be used.
- (4). If an electric screwdriver is used, it should be well grounded and shielded from commutator sparks.

(5) The normal static prevention measures should be observed for work clothes and working benches; for the latter conductive (rubber) mat is recommended.

(6). Since dry air is inductive to statics, a relative humidity of 50-60% is recommended.

2.3 Soldering

- (1). Solder only to the I/O terminals.
- (2). Use only soldering irons with proper grounding and no leakage.
- (3). Soldering temperature : $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
- (4). Soldering time: 3 to 4 sec.
- (5). Use eutectic solder with resin flux fill.
- (6). If flux is used, the LCD surface should be covered to avoid flux spatters. Flux residue should be removed afterwards.

2.4 Operation


- (1). The viewing angle can be adjusted by varying the LCD driving voltage V_0 .
- (2). Driving voltage should be kept within specified range; excess voltage shortens display life.
- (3). Response time increases with decrease in temperature.
- (4). Display may turn black or dark blue at temperatures above its operational range; this is (however not pressing on the viewing area) may cause the segments to appear "fractured".
- (5). Mechanical disturbance during operation (such as pressing on the viewing area) may cause the segments to appear "fractured".

2.5 Storage

If any fluid leaks out of a damaged glass cell, wash off any human part that comes into contact with soap and water. Never swallow the fluid. The toxicity is extremely low but caution should be exercised at all the time.



14. OUTLINE DRAWING

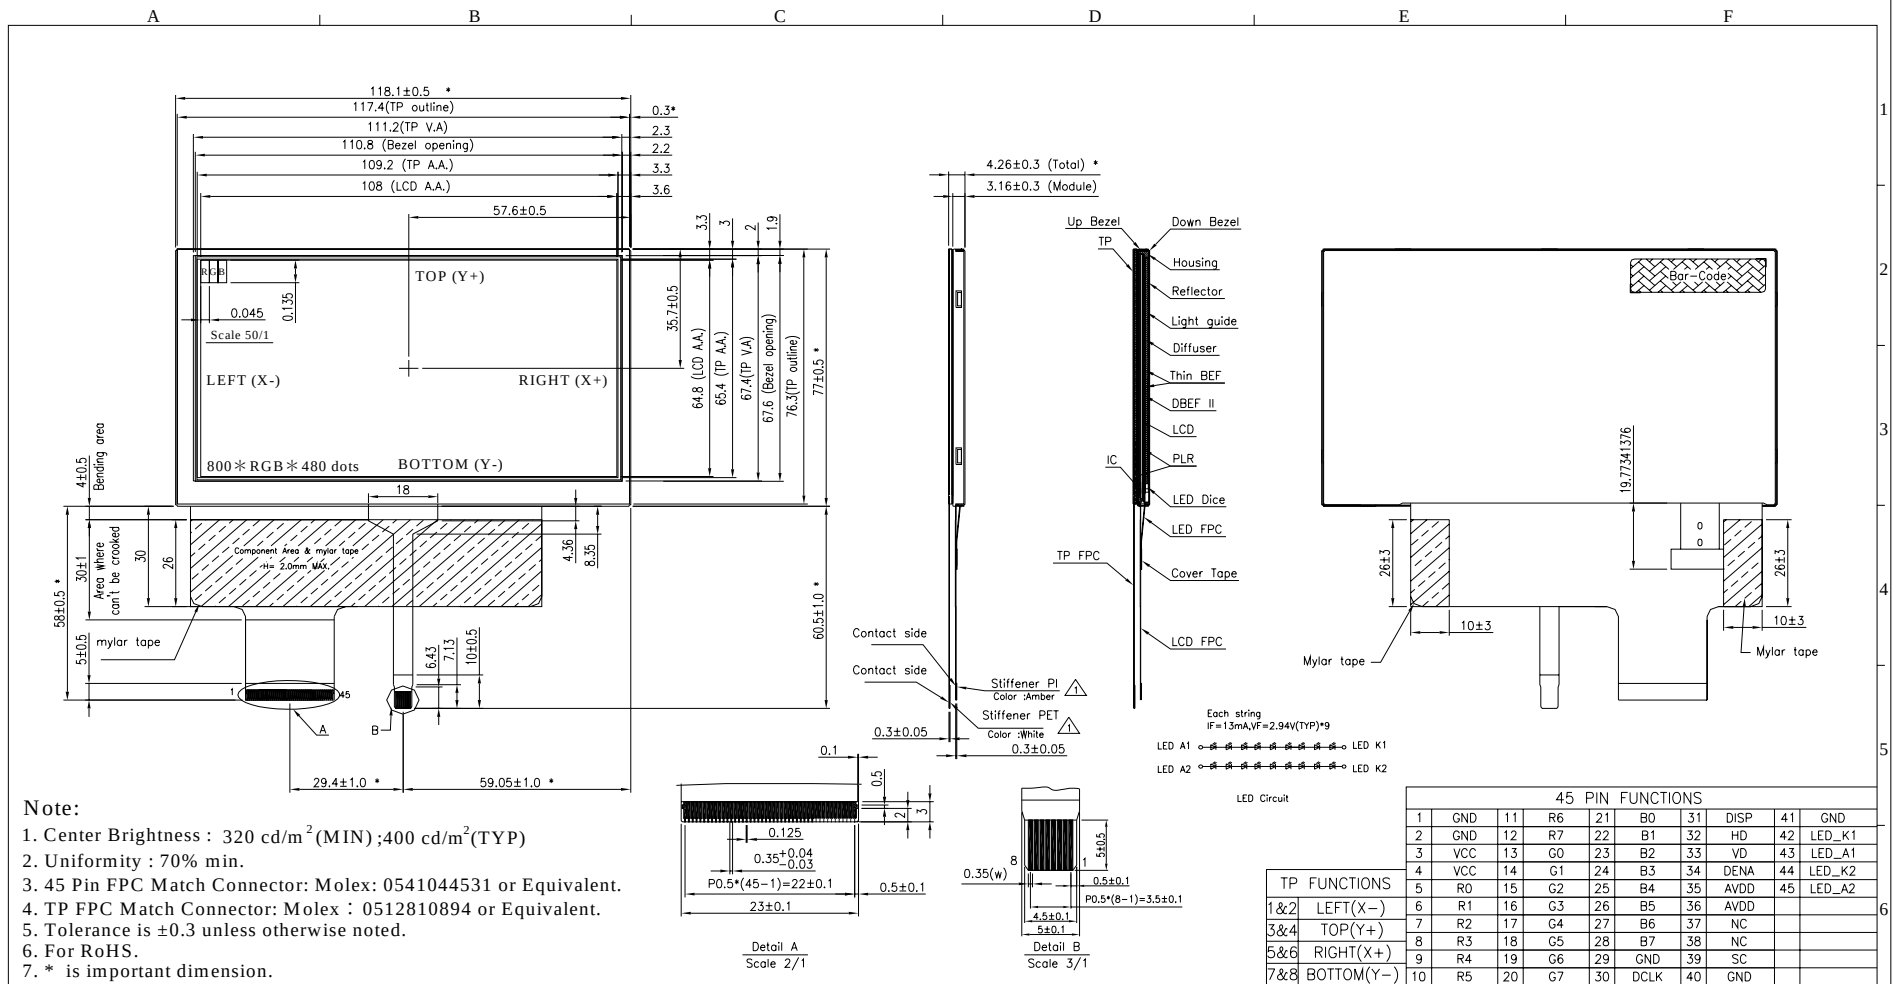

				DATE:		TITLE:					
				DRAWN:		LCM OUTLINE DIMENSION					
				CHECK:		DWG. NO.	LMTDA050YVN2-4RA1		INTELTRONIC INC.		
AUTH	DESCRIPTION		DATE	APPROVED		UNITS	M M			REV.	B
REVISIONS					APPROVE:		SCALE	1 / 1		SHEET	1 OF 1



15 .Inspection Specifications

The buyer (customer) shall inspect the modules within twenty calendar days since the delivery date (the "inspection period") at its own cost. The results of the inspection (acceptance or rejection) shall be recorded in writing, and a copy of this writing will be promptly sent to the seller.

The buyer may, under commercially reasonable reject procedures, reject an entire lot in the delivery involved if, within the inspection period, such samples of modules within such lot show an unacceptable number of defects in accordance with this incoming inspection standards, provided however that the buyer must notify the seller in writing of any such rejection promptly, and not later than within three business days of the end of the inspection period.

Should the buyer fail to notify the seller within the inspection period, the buyer's right to reject the modules shall be lapsed and the modules shall be deemed to have been accepted by the buyer.

16. Warranty

Inteltronic Inc. warrants to you, the original purchaser, that each of its products will be free from defects in materials and workmanship for one year from the date of purchase.

Inteltronic Inc. will be limited to replace or repair any of its module which is found and confirmed defective electrically or visually when inspected in accordance with Inteltronic Inc. general module inspection standard.

This warranty does not apply to any products which have been on customer's production line, repaired or altered by persons other than repair personnel authorized by Inteltronic Inc., or which have been subject to misuse, abuse, accident or improper installation. Inteltronic Inc. assumes no liability under the terms of this warranty as a consequence of such events.

If an Inteltronic Inc. product is defective, it will be repaired or replaced at no charge during the warranty period. For out-of-warranty repairs, you will be billed according to the cost of replacement materials, service time and freight. In returning the modules, they must be properly packaged with original package; there should be detailed description of the failures or defect.

17. RMA

Products purchased through Inteltronic Inc. and under warranty may be returned for replacement. Contact support@inteltronicinc.com for RMA number and procedures



Office Locations



Inteltronic Inc.
www.inteltronicinc.com
Office: 510-471-9900
Fax: 510-471-9901
Address: 29470 Union City Blvd
Union City, CA 94587



www.wahlee.com
Wah Lee Industrial Corp.
HSINCHU OFFICE
18F, No.8, Zihciang S. Rd., Jhubei,
Hsinchu 302, Taiwan, R.O.C.
Tel : 886-3-6205880
FAX: 886-3-6205833

