



LMALC348DH21

Features

- Resizing LCD
- Ultra-Wide Screen (16 : 2.2)
- High Brightness 2000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- BL MTBF: 100,000 hours


Specifications


Description	34.8" Resizing LCD, 2000 nits LED backlight, 1920x264
Screen Size	34.8"
Display Area (mm)	878.112(H) x 118.6(V)
Brightness	2000 cd/m ²
Resolution	1920x264
Aspect Ratio	16 : 2.2
Contrast Ratio	9940 : 1
Pixel Pitch (mm)	0.4494(H) x 0.4494(V)
Pixel Per Inch (PPI)	55
Viewing Angle	178°(H),178°(V)
Color Saturation (NTSC)	80%
Display Colors	16.7M
Response Time (Typical)	8.5ms
Panel Interface	LVDS
Power Consumption	37W
Dimensions (mm)	899.4x 149.3 x 18.85
Bezel Size(U/B/L/R)	12/12/8.6/8.6 mm
Weight (Net)	2.8 kg
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C
LED Driving Board (Optional)	
Control Board (Optional)	
Control Button (Optional)	



Outline Dimensions

Unit: mm

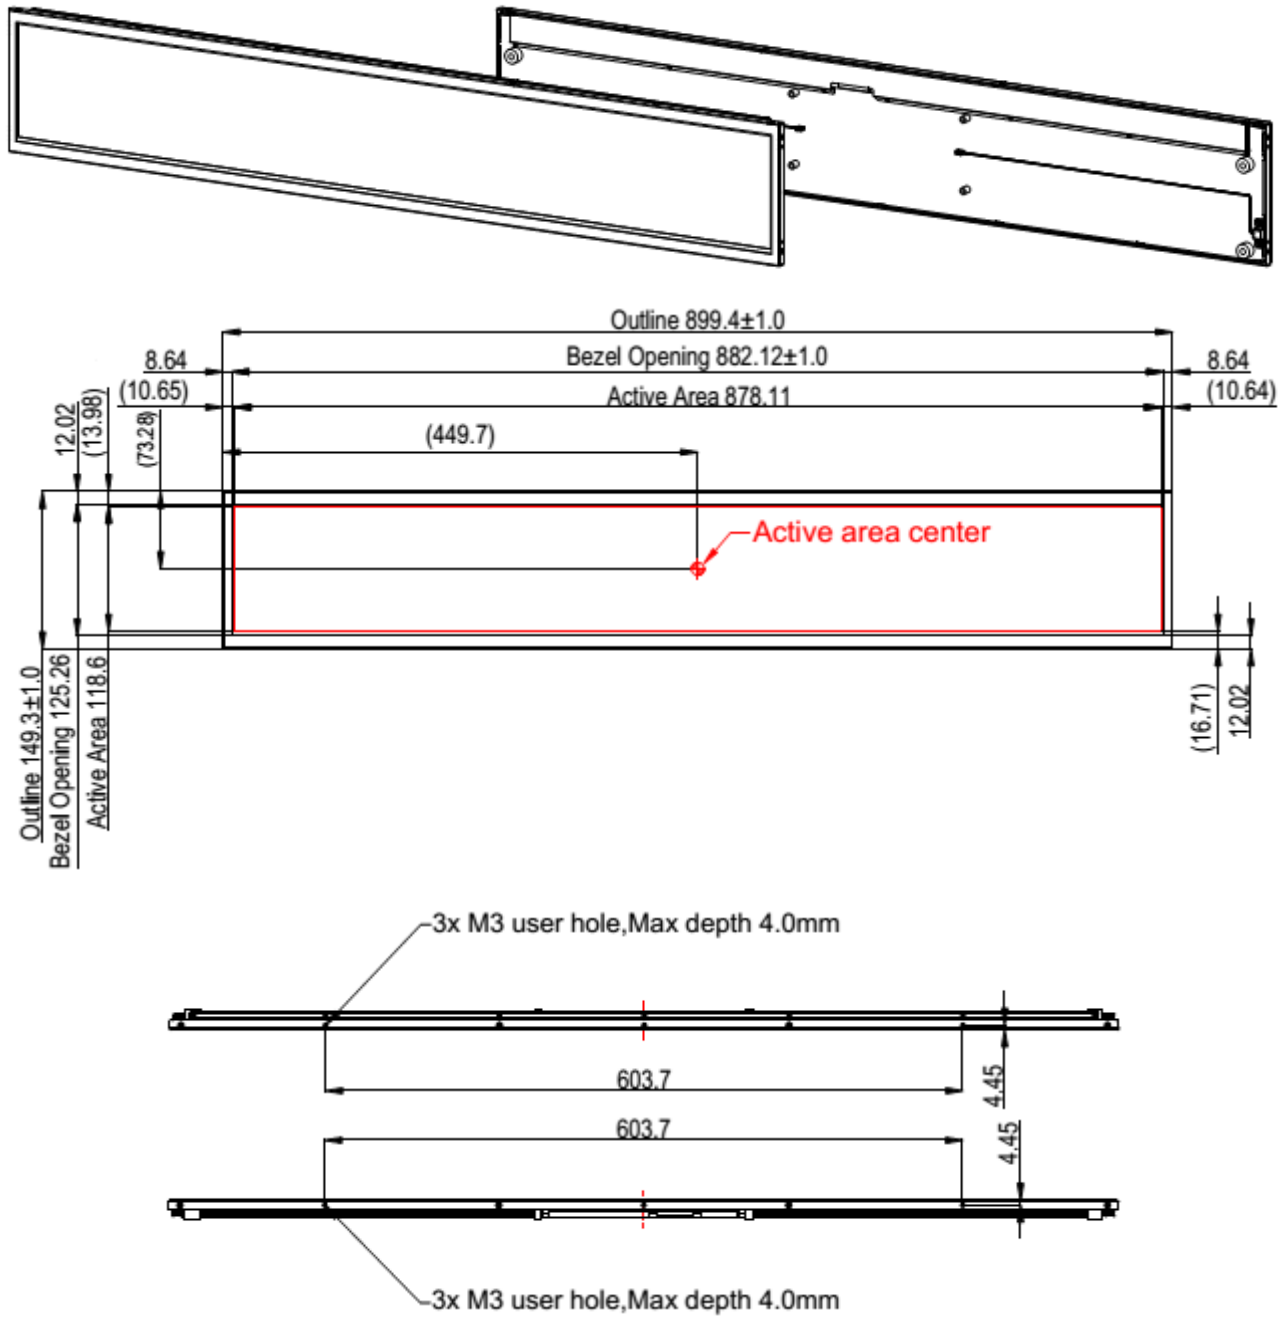

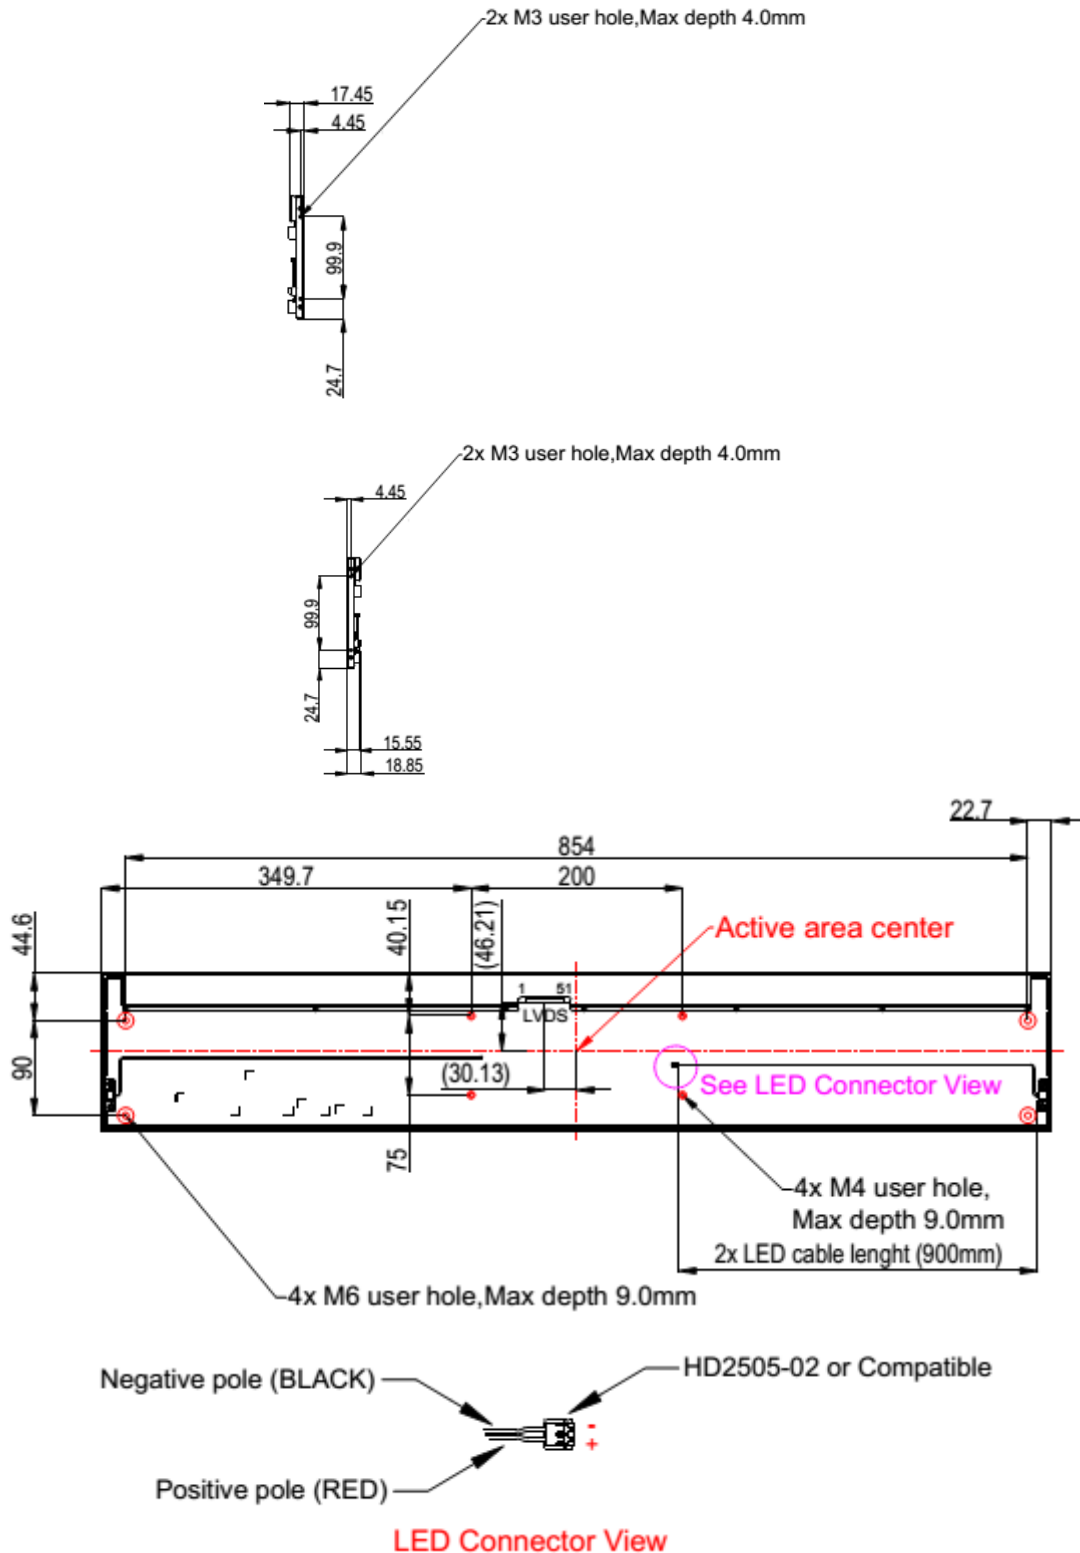

Note:

1. Resolution: 1920x264
2. Tolerance is $\pm 0.5\text{mm}$ unless noted
3. "()" marks the reference dimensions
4. LVDS Connector Pin Assignment (187059-51221 (P-TWO) , WF23-402-5133 (FCN))
Matting connector : FI-RE51HL (JAE)

